


Cordell

OUR DOORS ARE ALWAYS OPEN

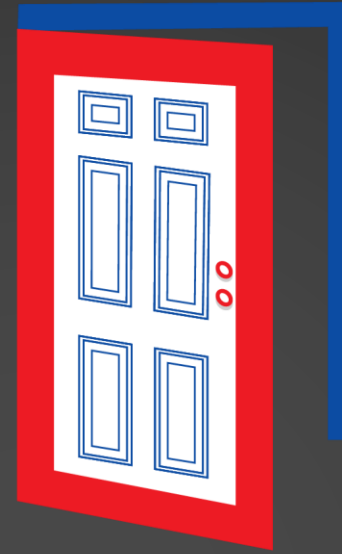

doors

Cordell Doors is a family owned and operated business. We specialize in doors for: Portable Buildings, Carports, Modular/Manufactured Housing, Workforce Housing, Oilfield Housing, and Mobile Office Trailer sectors.

Here at Cordell Doors you can be rest assured that we take great pride in providing you with the best doors at a fair price; after all, our family name is on the doors.


Our doors are AAMA approved to weather any environment you plan to use them in. We sell and ship all over the world from one pallet to full truck or container loads.

We would like to thank you for taking your time to look at our products and hope we can meet any needs you may have for your industry. Our slogan is: "Our Doors are Always Open" and we mean that. If you have any questions, please feel free to contact us via phone or email and we will get back to you promptly.



Cordell

OUR DOORS ARE ALWAYS OPEN

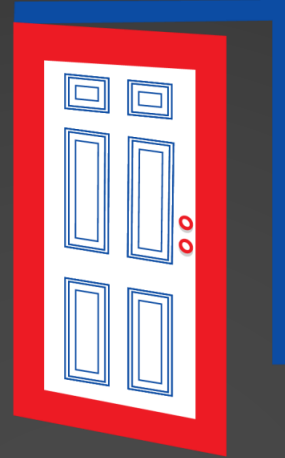

Doors

Combination Doors

This is the 925 Series 6-Panel Combination Door with a 1 1/4" heavy duty storm door for added support. This series has a threshold with a thermal break. The core is mortised for all your lock needs and drilled for both deadbolt and entry lock. The sleek design of this door is a great look for manufactured and modular homes. This 925 series is AAMA Approved.

Knocker Viewer



Standard Sunburst



WP Decorative Sunburst



SIZE	SIZE	SIZE	SIZE	SIZE
32 x 72	32 x 74	32 x 76	32 x 78	32 x 80
34 x 76	34 x 78	34 x 80		
36 x 76	36 x 78	36 x 80		
38 x 76	38 x 80	38 x 82		

SIZE	SIZE	SIZE	SIZE	SIZE
32 x 76	32 x 78	32 x 80		
34 x 76	34 x 78	34 x 80		
36 x 76	36 x 78	36 x 80		
38 x 76	38 x 80	38 x 82		

SIZE	SIZE	SIZE	SIZE	SIZE
32 x 76	32 x 78	32 x 80		
34 x 76	34 x 78	34 x 80		
36 x 76	36 x 78	36 x 80		
38 x 76	38 x 80	38 x 82		

9 Lite



36" Internal Mini Blind



64" Internal Mini



SIZE	SIZE	SIZE	SIZE	SIZE
32 x 72	32 x 74	32 x 76	32 x 78	32 x 80
34 x 76	34 x 78	34 x 80		
36 x 76	36 x 78	36 x 80		
38 x 76	38 x 80	38 x 82		

SIZE	SIZE	SIZE	SIZE	SIZE
32 x 72	32 x 74	32 x 76	32 x 78	32 x 80
34 x 76	34 x 78	34 x 80		
36 x 76	36 x 78	36 x 80		
38 x 76	38 x 80	38 x 82		

SIZE	SIZE	SIZE	SIZE	SIZE
32 x 72	32 x 74	32 x 76	32 x 78	32 x 80
34 x 76	34 x 78	34 x 80		
36 x 76	36 x 78	36 x 80		
38 x 76	38 x 80	38 x 82		

36" Laurel Decorative



36" WP Decorative



64" WP Decorative



SIZE	SIZE	SIZE	SIZE	SIZE
32 x 72	32 x 74	32 x 76	32 x 78	32 x 80
34 x 76	34 x 78	34 x 80		
36 x 76	36 x 78	36 x 80		
38 x 76	38 x 80	38 x 82		

SIZE	SIZE	SIZE	SIZE	SIZE
32 x 72	32 x 74	32 x 76	32 x 78	32 x 80
34 x 76	34 x 78	34 x 80		
36 x 76	36 x 78	36 x 80		
38 x 76	38 x 80	38 x 82		

SIZE	SIZE	SIZE	SIZE	SIZE
32 x 72	32 x 74	32 x 76	32 x 78	32 x 80
34 x 76	34 x 78	34 x 80		
36 x 76	36 x 78	36 x 80		
38 x 76	38 x 80	38 x 82		

Oval



Texas Star



Vertical Slide



SIZE	SIZE	SIZE	SIZE	SIZE
32 x 72	32 x 74	32 x 76	32 x 78	32 x 80
34 x 76	34 x 78	34 x 80		
36 x 76	36 x 78	36 x 80		
38 x 76	38 x 80	38 x 82		

SIZE	SIZE	SIZE	SIZE	SIZE
32 x 72	32 x 74	32 x 76	32 x 78	32 x 80
34 x 76	34 x 78	34 x 80		
36 x 76	36 x 78	36 x 80		
38 x 76	38 x 80	38 x 82		

SIZE	SIZE	SIZE	SIZE	SIZE
32 x 72	32 x 74	32 x 76	32 x 78	32 x 80
34 x 76	34 x 78	34 x 80		
36 x 76	36 x 78	36 x 80		
38 x 76	38 x 80	38 x 82		

When measuring your door please see the table to the right.


- Getting the correct hand you will need to be outside looking at the door. If the hinges is on the left, then it is a Left-hand door.
- The rough opening must be the size of the rough opening to the right. If you don't prep for the door Installation, then the door will not work properly and will void the warranty.
- When you get the correct door for you opening then please see the just page for Installation instructions.



This is a Right Hand



This is a Left Hand



Hinges

This is the View for the Outside of your home!

Call Size { Our Size }	Rough Opening Size	Buck Opening Size
32 x 72	32" x 72"	31 1/2" x 71 1/2"
32 x 74	32" x 74"	31 1/2" x 73 1/2"
32 x 76	32" x 76"	31 1/2" x 75 1/2"
32 x 78	32" x 78"	32 1/2" x 77 1/2"
32 x 80	32" x 80"	32 1/2" x 79 1/2"
34 x 76	34" x 76"	33 1/2" x 75 1/2"
34 x 78	34" x 78"	33 1/2" x 77 1/2"
34 x 80	34" x 80"	33 1/2" x 79 1/2"
36 x 76	36" x 76"	35 1/2" x 75 1/2"
36 x 78	36" x 78"	35 1/2" x 77 1/2"
36 x 80	36" x 80"	35 1/2" x 79 1/2"
38 x 76	38" x 76"	37 1/2" x 75 1/2"
38 x 80	38" x 80"	37 1/2" x 79 1/2"
38 x 82	38" x 82"	37 1/2" x 81 1/2"



Do not remove any shipping clips, spacers, or fasteners and keep the door closed and locked during the installation.

Opening the window prior to the installation may affect any pre-squaring done by the manufacturer.

- 1} Place the door in a position suitable to apply a non-hardening tape, such as putty tape, to the mounting flange being sure to center it over all mounting holes. A sealant from a gun may be used in addition to the putty, cover all mounting holes and be free of gaps or voids.
- 2} Inspect the opening to make sure it is square and built to accept the door as ordered, a general rule is to allow clearance 1/2" from the side and 1/4"-1/2" on top to bottom from the A-line dimension of the door. Ensure the opening is square so when installing the door it is not installed into a position that will cause the door to not work as designed.
- 3} Insert the assembly carefully into the rough opening. Make certain the door sill is level with the opening. Position the door in approximate center of rough opening, hold the door flat against the wall and secure it with preliminary screw; three on one side, beginning with the middle one, then one above and one below the center screw, proceeding in the same order. (The door frame is pre-drilled with screw positions at no more than 5-1/2" from the end on 8" centers for the 200 series and from .25" from edge typical, in the exterior of the frame so no measuring is required.)
- 4} Do not tighten these screws until the door is checked for squareness and make any necessary adjustments. Standard door shims can be added as needed to the interior to ensure proper alignment. Tighten these 6 screws to lock the assembly in position.
- 5} Once the door is in place, tighten the preliminary screws and proceed to install any remaining screws, starting from the middle of a side and working towards the corners. The screw should penetrate the mounting frame to a depth of at least one inch and care should be taken to drive the screws straight into the studs, not at an angle. Tighten the screws until the putty squeezes out.
- 6} Install screws in the top and bottom horizontal rails in the same manner as the vertical rails until all attachment points are filled.
- 7} The door should now be securely fastened to the wall and safe to use the features of the door. Remove the shipping clips and operate the door several times to be sure it functions as designed.
- 8} Optional- Attach two screws of length between 1-1/2" - 2" into one hole of the latch and deadbolt (if included) brackets that securely enters the jamb.
- 9} Any additional sealant to the exterior can be added as deemed necessary by the installer to complete their installation requirements.
- 10} Install hardware and any safety chain in compliance with the manufacturer's instructions at this time.

You have completed the installation of your Cordell Door.